

Cubro Packetmaster EX 32 (+)

32 x 10 Gbps 2 x 40 Gbps NPB



The Packetmaster EX 32(+) is a high performance Network Packet Broker that aggregates, filters, load balances and manages network traffic.

Network traffic can be sent to monitoring, security and management tools. Packetmaster EX 32(+) allows you to filter and load-balance traffic from 10 or 40-Gbps links to multiple 1-Gbps monitoring tools or aggregate multiple 1 Gbps links to 10 or 40-Gbps monitoring tools.

Packetmaster EX32(+) also supports traffic modification as well as changing, removing, and adding VLAN, MPLS, VXLAN, NVGRE, MLA, GENEVE.

No additional software costs; all applications included in the unit price.

Extended Functions:

The management host controller of every EX unit runs fully featured Debian Linux as the operating system. On this host, script languages like Python, Perl, TCL, or simple Linux shells are available to run 3rd party applications to extend the function of the Packetmaster. These applications can be developed by Cubro or the customer.



A perl script collects counters and writes these counters in an external SQL Database for later analysis.



A python script reads files from a server and sets filters based on this changing data.

A python script changes the filters based on link load information from another Packetmaster.



A shell script pings different devices and changes filter rules based on ping response.



Cubro is a trademark of Cubro Acronet GesmbH 1110 Vienna / Austria

Functions

Link/Port Aggregation

Aggregation many to any and any to many at all link speeds

40 Gbps Traffic Demultiplexer

If highly loaded 40 Gbps links have to be monitored the traffic can be easily demultiplexed into 48 low traffic 10 Gbps links.

Jumbo Frame Support

The Packetmaster supports jumbo Ethernet frames with a size of up to 16000 Bytes.

Support of IPv4 and IPv6.

Ports

32 x 10 Gbps/1 Gbps and
2 x QSFP 40 Gbps (EX32+)

1 x 10/100/1000 Base-T (Management)
1 x RS232 Console
1 x USB

Configuration / Communication

Web GUI, Telnet, and SSH

Bandwidth

1.2 Tbps backplane
1700 million Packets per sec

Aggregation Latency

Average < 1 µs for 64-byte frames

MTBF

184,125 hours

Rugged 19" Housing

The Packetmaster is delivered in a rugged 19" 1U housing with precise connector labeling on the front panel.

Different Power Versions

110, 230 VAC in single and dual power supply versions available.

Operating Temperature

0 to 45°C

Operating Humidity

90% maximum relative humidity

Dimensions


W=435.00 mm, L=393.70 mm, H=42.80 mm

The Cubro Packetmaster EX32(+) is a reliable Network Packet Broker. Designed for high speed and no loss packet handling.

General Functions

Aggregation: Traffic aggregation from many input ports to one or many output ports. This also works with different link speeds up to 40 Gbps.

Filtering: 64,000 flow rules (filters) can be set in the unit.

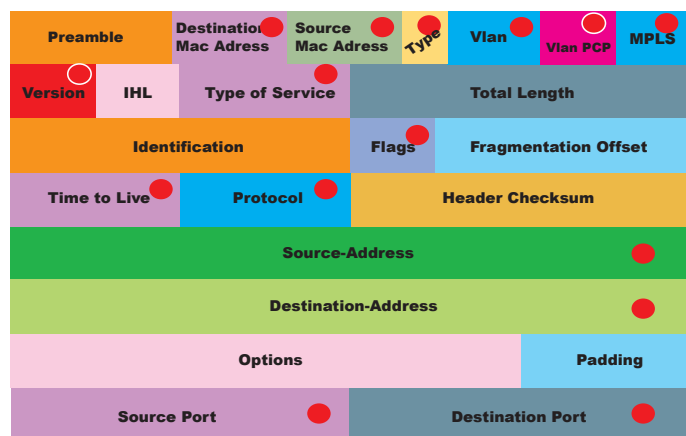

The fields marked with red dots can be used as a filter match for a packet, stand-alone, combined or with wild cards. For IP, Src and IP Dst super nets are supported.

Available action functions after a positive match are:

Send out: To one or more ports - even sending to the same port as the input port is possible.

Drop: Delete the specific packet.

Modify: Modify specific fields in the matched packets, VLAN, MPLS, MAC SRC, MAC DST, PORT, VLAN Priority among others.

Add VLAN: The unit can tag a VLAN on the input port to separate the traffic after aggregation.

Strip VLAN: VLAN can be removed, Q in Q is supported.

Add MPLS: Add an MPLS tag to a matched packet.

Strip MPLS: Remove an MPLS tag from a matched packet.

Stacking of rules: Generates very complex filter rules.

Lifetime of rules: Rules can be set with a time counter. If the counter becomes 0 the rule will be removed automatically.

Generate nFLOWS and sFLOWS CDRS:


The EX32(+) can send standard nFlow or sFlow CDRS to collector devices to monitor the traffic processed by the EX 32(+).

GRE Tunnel Support: The device can work as an end device for a GRE tunnel, in back hauling applications.


VXLAN Tunnel Support: The device can work as an end device for a VXLAN tunnel, in back hauling applications.

Load Balancing: L2 / L3 hash based load balancing, for up to 10 load balancing groups.

AAA Radius Support: User log in and identification.

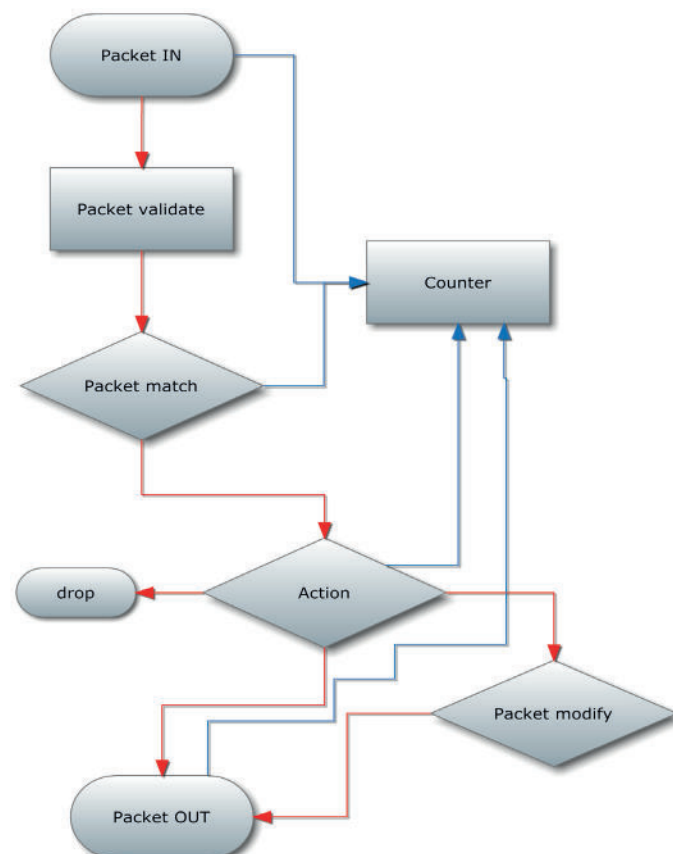

Technical Data

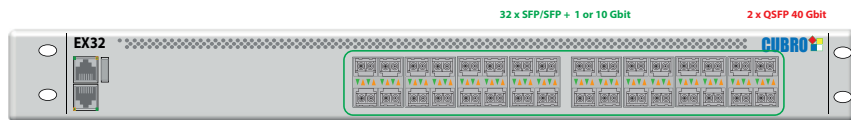

Switch Table									
Port	Port Type	Port Name	Port Description	Port Status	Port Speed	Port Mode	Port Power	Port Temperature	Port Error
1	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
2	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
3	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
4	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
5	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
6	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
7	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
8	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
9	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
10	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
11	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
12	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
13	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
14	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
15	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
16	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
17	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
18	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
19	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
20	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
21	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
22	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
23	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
24	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
25	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
26	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
27	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
28	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
29	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
30	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
31	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
32	SFP	1/24	10/100/1000	Up	1000	Full Duplex	10W	40°C	0
33	QSFP	40G	40/40/40/40	Up	40000	Full Duplex	15W	40°C	0
34	QSFP	40G	40/40/40/40	Up	40000	Full Duplex	15W	40°C	0

Inputs*

32 x 10/1 Gbps full duplex
2 x 40 Gbps QSFP (+ version)

* Each port can be input and / or output depending on the application and configuration

Outputs*

32 x 1/10 Gbps full duplex
2 x 40 Gbps QSFP (+ version)

*Each port can be input and / or output depending on the application and configuration

Performance

Performance up to 1200 Gbps, 1.2 Tb

1700 million packets/sec

Non blocking design

Boot time from power on to working = 180 sec.

Packet delay through processing less than 1 µs

Management

Management Port: (1) RJ45 10/100/1000 Mbit
Configuration (CLI) Port: (1) RS-232 DB9
USB for software update

Indicators

Per RJ45 port: Speed, Link/ Activity
Per SFP+ port: Status, Rx, Tx, Link
Per QSFP port Status, Rx, Tx, Link
Per device: Power, Status

Operating Specifications

Operating Temperature: 0°C to 40°C

Storage Temperature: -10°C to 70°C

Relative Humidity: 10% min, 95% max,

Non-condensing

Mechanical Specifications:

Dimensions (HxWxD): 42.8 x 435 x 393.7 mm

Weight : 7.2 kg

Airflow: Front -Back

Electrical Specifications:

Input Power: 100-240V, 2A, 47-63Hz

Maximum power consumption: 170W

Certifications

Fully RoHS compliant

CE compliant

Safety:

UL 60950-1 / CSA C22.2 60950-1-07 / IEC 60950-1 (2005)

EN 60950-1 (2006)




Cubro is a trademark of Cubro Acronet GesmbH 1110 Vienna / Austria

www.cubro.net


32 x 10 Gbps 2 x 40 Gbps NPB

App: 40 Gbit Load Balancing

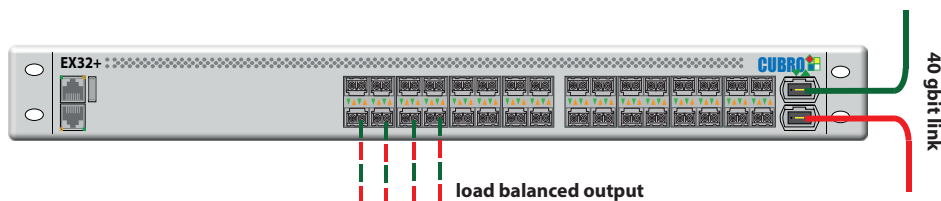

The EX 32+ is connected inline to a 40 Gbit link. Using the load balancing capability of the Packetmaster EX 32+, it is possible to load balance the 40 Gbit traffic to several 10 Gbit ports.

App: 10 Gbit Aggregation

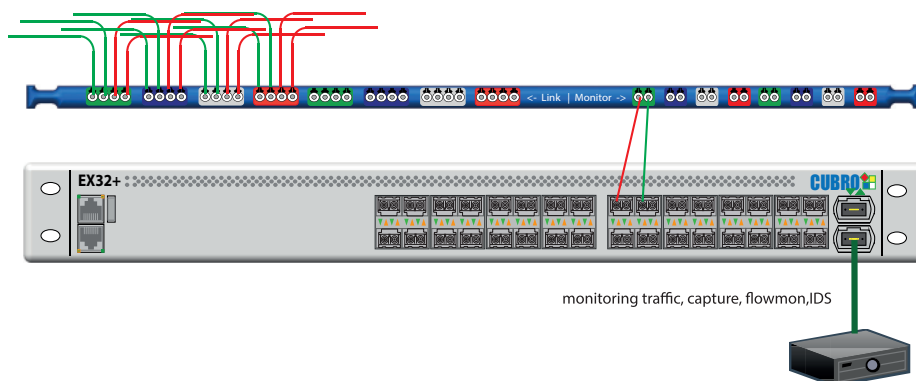

The EX 32+ is connected via the Cubro optical TAP to a 10 Gbit link.

The aggregation feature combines the traffic of up to 16 x 10 Gbit links to two 40 Gbit outputs for monitoring purposes. Using the filtering capability of the Packetmaster EX 32+, the user can now select only the portion of the traffic which is needed to solve the network problem.

App: GRE decapsulation in hardware up to 10 Gbit linespeed

Before GRE de encapsulation

```

Frame 1698: 604 bytes on wire (4832 bits), 604 bytes captured (4832 bits) on interface 0
Ethernet II, Src: Vmware_63:23:42 (00:50:56:63:23:42), Dst: CentecNe_0a:10:16 (00:1e:08:0a:10:16)
Internet Protocol Version 4, Src: 172.17.1.1 (172.17.1.1), Dst: 172.17.1.2 (172.17.1.2)
Generic Routing Encapsulation (Transparent Ethernet bridging)
Ethernet II, Src: IntelCor_5b:b0:9c (60:67:20:5b:b0:9c), Dst: Vmware_aa:c0:d3 (00:50:56:aa:c0:d3)
Internet Protocol Version 4, Src: 172.16.100.61 (172.16.100.61), Dst: 172.16.101.220 (172.16.101.220)
Transmission Control Protocol, Src Port: 64008 (64008), Dst Port: 80 (80), Seq: 3827, Ack: 68616, Len: 500
Hypertext Transfer Protocol
GET /modules/imageframe/frames/flicking/BR.gif HTTP/1.1\r\n
[Expert Info (Chat/Sequence): GET /modules/imageframe/frames/flicking/BR.gif HTTP/1.1\r\n]
Request Method: GET
Request URI: /modules/imageframe/frames/flicking/BR.gif
Request Version: HTTP/1.1
Host: album.creneco.com\r\n
User-Agent: Mozilla/5.0 (Windows NT 6.1; WOW64; rv:38.0) Gecko/20100101 Firefox/38.0\r\n
Accept: image/png,image/*;q=0.8,*/*;q=0.5\r\n
Accept-Language: en-US,en;q=0.5\r\n
Accept-Encoding: gzip, deflate\r\n
Referer: http://album.creneco.com/main.php?g2_view=imageframe.css&g2_frames=none%7Cshadow%7Cflicking\r\n
Cookie: GALLERYSID=78cb78dbabb51f330677f4a72c4f22b9\r\n

```

After GRE de encapsulation

```

Frame 7508: 568 bytes on wire (4544 bits), 568 bytes captured (4544 bits) on interface 0
Ethernet II, Src: Cisco_73:7e:c2 (00:17:94:73:7e:c2), Dst: Vmware_aa:c0:d3 (00:50:56:aa:c0:d3)
Internet Protocol Version 4, Src: 172.16.100.61 (172.16.100.61), Dst: 172.16.101.220 (172.16.101.220)
Transmission Control Protocol, Src Port: 64325 (64325), Dst Port: 80 (80), Seq: 4688, Ack: 100998, Len: 500
Hypertext Transfer Protocol
GET /modules/imageframe/frames/flicking/BR.gif HTTP/1.1\r\n
Host: album.creneco.com\r\n
User-Agent: Mozilla/5.0 (Windows NT 6.1; WOW64; rv:38.0) Gecko/20100101 Firefox/38.0\r\n
Accept: image/png,image/*;q=0.8,*/*;q=0.5\r\n
Accept-Language: en-US,en;q=0.5\r\n
Accept-Encoding: gzip, deflate\r\n
Referer: http://album.creneco.com/main.php?g2_view=imageframe.css&g2_frames=none%7Cshadow%7Cflicking\r\n
Cookie: GALLERYSID=78cb78dbabb51f330677f4a72c4f22b9\r\n

```

